


## ■ Installation (External Corner)



An external corner can be tiled with combinations of External Corner Starter Units and their vertically flipped Units (brick joint). Allow a joint width of 3 mm between the back faces of each unit and side faces of the combined units.

## ■ Installation Photo

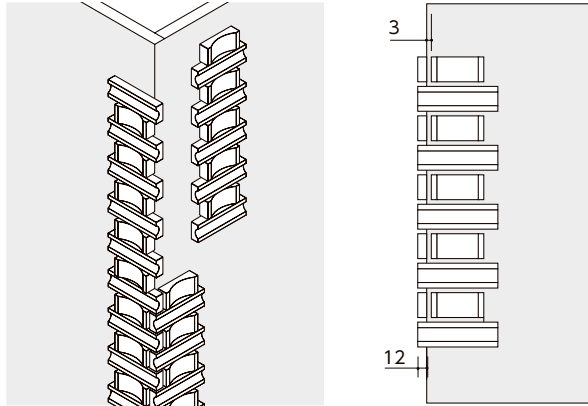